

CAT5E F/UTP

Application: Shipboard installations, Maritime Environment, Fixed or portable installations, Indoor & Outdoor use, fixed installations, High data rates, Ships, High speed & Light craft.

Operate at: -40°C to +75°C, Bend minimum: 10~20 times O.D.

Weight: Approximately 40kg/km

Standards: ISO/IEC 11801, IEC 61156-1, IEC 61156-5, IEC 60092-350, IEC 60092-360, RoHS-2 2011/65/EU, UL1581

Design & Construction

Conductor: Bare copper, 23 AWG or 24 AWG

Insulation: PE

Pair: 2 insulated conductors stranded together into a pair

Core identification: 1. White/blue + Blue 2. White/orange + Orange
3. White/green + Green 4. White/brown + Brown

Outer shield: Aluminum Foil-Polyester Tape

Drain wire: Tinned copper wire

Outer jacket (optional): LSZH-SHF1, LSZH-SHF2 or LSZH-SHF2-MUD

Outer jacket OD: 6.6 ± 0.5 mm (24 AWG), 6.8 ± 0.5 mm (23 AWG)

Marking (example): YANGER® CAT5E 4x2x24/1 AWG F/UTP LSZH-SHF1 <dd/mm/yy> <meter marking>

Outer jacket color: Grey (optional)

Environmental properties and fire performances

Degree of acidity of gases: IEC 60754-1/2

Halogen acid gas: IEC 60754-1/2

Smoke emission: IEC 61034-1/2

Flame retardant: IEC 60332-1-2, IEC 60332-3-22

UV resistance: UL 1581

Electrical characteristics

Resistance of the conductor@20°C: ≤ 145 Ω/km

Insulation resistance: ≥ 5000 MΩ/km

Transfer impedance: < 100 mΩ/m @10 MHz

Average characteristic impedance@ 100 MHz: 100 ± 5 Ω

Delay skew (4~100 MHz): ≤ 45 ns/100m

Velocity factor: 67%

Conductor resistance unbalance within pair: ≤ 2.0%



Conductor resistance unbalance between pair: ≤ 4.0%

Capacitance unbalance to earth at 800 Hz or 1000 Hz: ≤ 160 pF/100m

Mutual capacitance: ≤ 56 nF/km

Electrical properties

Frequency (MHz):	1	4	8	10	16	20	25	31.25	62.5	100
Attenuation dB/100m (Max.)	—	4.1	5.8	6.5	8.2	9.3	10.4	11.7	17	22
NEXT dB (Min.)	65.3	56.3	51.8	50.3	47.2	45.8	44.3	42.9	38.4	35.3
PS-NEXT (Min.)	62.3	53.3	48.8	47.3	44.2	42.8	41.3	39.9	35.4	32.3
ELFEXT dB (Min.)	64	52	45.9	44	39.9	38	36	34.1	28.1	24
Return Loss dB (Min.)	20	23	24.5	25	25	25	24.3	23.6	21.5	20.1
PSELFEXT dB (Min.)	61	49	42.9	41	36.9	35	33	31.1	25.1	21

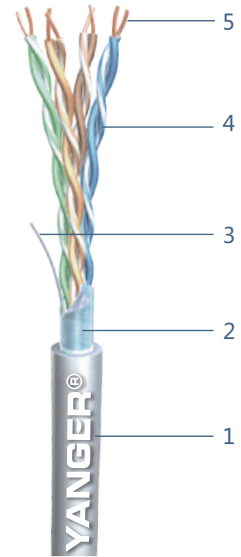

1. Outer jacket
2. Outer shield
3. Drain wire
4. Insulation
5. Conductor



Halogen free
IEC 60754



Low smoke
IEC 61034



Flame retardant
IEC 60332-3-22



UV resistant
UL 1581